



*The People You Know. The Products You Trust.*

## **A7 Zephyr**

- Runway Sweeper
- 8.4 Cubic Yard Hopper
- Noise Reduction Shroud
- Regenerative Air Sweeping
- Whisper Wheel<sup>SM</sup> Fan System
- Schwarze Sweeps-in-Reverse<sup>SM</sup>
- DC Auxiliary Hydraulic Pump



**QUALITY - PERFORMANCE - PUBLIC SAFETY  
VALUE - CUSTOMER SUPPORT**

800-879-7933

[www.schwarze.com](http://www.schwarze.com)

# A7 Zephyr

8.4 Cubic Yard Regenerative Air Runway Sweeper



AMERICAN BUILT-  
AMERICAN MADE

## QUALITY

**Bolt in Pressure & Transition Tubes:** Ease of maintenance (reduced cost of ownership)

**Abrasion Resistant Steel in Critical Wear Areas:** Longer life expectancy equates to reduced cost of ownership

**Four Point Protection<sup>SM</sup>:** Optional stainless steel hopper package for long lasting performance

## PERFORMANCE

**Optional Equipment: Gutter Broom Extension Override<sup>SM</sup>:** Increased usability of gutter brooms and expands the versatility in various applications, while eliminating the need for a center broom

**Saw tooth Screens:** Increased screen surface area creates more productivity, eliminates the need for a screen vibrator, lower cost of operation



**Whisper Wheel<sup>SM</sup> Fan System:** 70% quieter, uses 20% less fuel and 7% more powerful than an open face fan design

**Optional Equipment:** Self-dumping magnet bar, in-cab tilt controls for gutter brooms



The Schwarze A7 Zephyr is a chassis mounted, regenerative air runway sweeper with an 8.4 cubic yard hopper. With over 20 years of successful operation throughout the world, the A7 Zephyr is a heavy duty workhorse that will provide a high quality option with a low cost of ownership. Come to the people you know, for the products you trust.



Whisper Wheel<sup>SM</sup> Fan System



In Cab Hydraulic Tilt

# PUBLIC SAFETY

**Sweeps in Reverse<sup>SM</sup>:**  
Eliminates the need for the operator to raise the sweeping head to reverse

**Noise Level:**  
Reduced operator stress and increased ability to operate in noise sensitive areas

**PM 10 Certified:**  
Meets AQMD 1186.1 requirements to pick up and contain harmful particulates

**Optional Equipment:**  
One to three remote cameras with in-cab video monitor and sound suppression system



# VALUE

**Modular Componentry:**  
Reduced repair time and cost of ownership

**8.4 Cubic Yard Hopper Capacity:** Increased hopper capacity equates to increased production and less dumps

**90"x36" Sweeping Head:**  
Increased productivity with a larger area of influence (quicker transfer, no bulldozing)

**Optional Equipment:**  
8" auxiliary hand hose, extra 350 gallon polyethylene water tank

**Financing Available**



**Parts Availability:** Schwarze original equipment parts are available when you need them.



**Trusted Dealers:** Trusted dealers will support you before and after-purchase needs.



**Empowered and Responsive:** Schwarze People are valued for their commitment to our future.



**Schwarze Products:** Engineered for enhanced sweeping performance and low ownership cost.


# CUSTOMER SUPPORT



**Warranty Support:** Schwarze people are on duty to support you and your equipment.

Schwarze regenerative air sweepers are guaranteed to be free from defects due to faulty materials and/or workmanship for a period of 12 months, or 1200 hours. Liability is limited to replacement of defective parts at factory or authorized dealer. The standard warranties of the chassis and sweeper engine manufacturer shall apply.

<b>Sweeping Path</b>	
Pickup Head Only	90" (2,286mm)
Pickup Head and one gutter broom	117" (2,972mm)
Pickup Head and two gutter brooms	144" (3,658mm)
<b>Chassis</b>	
Mounts on various chassis to meet requirements	
<b>Sweeper Body</b>	
Construction	Welded 10-gauge steel plate with 3/16 steel hopper floor
Safety Prop	Dual steel bars located under body
<b>Instrumentation</b>	
Sweeper Engine	Tachometer, hourmeter, voltmeter, temperature gauge, oil pressure gauge
<b>Standard Engine</b>	
Model / Type	4045T In line 6 cylinder
Aspiration	Turbo-charged diesel
Manufacturer	John Deere
Displacement	275 cu. in. (4.5L)
Brake Horsepower	115HP (86KW) @ 2400 RPM (Opt.140 HP)
Torque	317ft-lb (430Nm) @1500RPM
Air Cleaner	Sy Klone centrifugal precleaner; dry type with dual safety elements and restriction indicator
Oil Filter	Full-flow / Spin on
Stroke	5.00" (127mm)
Bore	4.20" (106mm)
Compression Ratio	19.0 to 1
Safety Shutdown	Three-point automatic
Throttle Control	Electronic
<b>Electrical System</b>	
Voltage	12 Volt
Sweeper Engine Alternator	65 Amperes
<b>Dust Control System</b>	
Type	High Pressure / Low volume
Capacity	250 Gallon (946 L) (600 gallon on cab-over chassis)
Tank Construction	Polyethylene
Filter	200 mesh, cleanable
Fill Diameter	2.5" (63.5mm)
Fill Hose	25 foot (7620mm)
Controls	Electric; in-cab

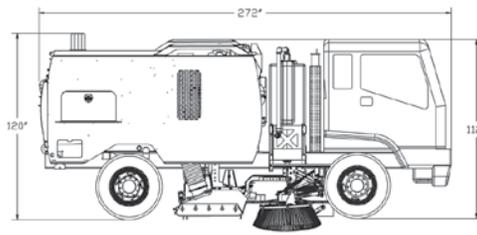

Model shown with optional equipment. Design and specifications subject to change without notice. Specifications may vary depending on chassis type.

<b>Dust Control System cont'd</b>	
Nozzles	2 on each broom 5 around suction head 2 inside suction nozzle 2 on front axle
<b>Blower System</b>	
Type	Closed-face radial
Drive	Direct via 5 groove, banded power belt
Construction	Hardox Steel
Balance	1.5 grams on 2 sides
Dimensions	32.75" x 5" (832mm x 184mm)
Housing Lining	Bolt-in corded rubber
Mounting	2 regreaseable sealed bearings
Vacuum Enhancer	For heavy /light material
<b>High Speed Pickup Head</b>	
Type	Mechani-Pneumatic, dual chambered full width blast orifice with window angle
Operating Direction	Forward and reverse
Suspension	Adjustable spring balanced
Length	90" (2,286mm)
Pressure Hose Diameter	14" (355.6mm)
Suction Hose Diameter	10" (254mm)
Center Dimensions	12" x 66" (305mm x 1676mm)
Hose Construction	3/8" (9.5mm) wire-reinforced molded rubber
Head Area	3,240 sq. in. (20,903cm <sup>2</sup> )
Controls	Hydraulic raise and lower; broom engaged/disengaged; lateral nozzle open/closed
Skids	Double wide tungsten carbide
Construction	Abrasion-resistant steel inlet and outlet transitions
Lateral Blast Nozzle	Integral to sweeping head on left side
<b>Paint</b>	
One coat of sealer / primer and two coats of Dupont Imron Elite polyurethane in standard white color	

<b>Side Brooms</b>	
Type	Vertical steel digger
Location	Right, Left, forward of pickup head
Diameter	44" (1117.60 mm)
Drive	Hydraulic
Suspension	Torque-sensing spring
Wear Adjustment	Automatic
Pressure	Manual
Speed	Variable, non-reversing
Segments	5 each side, disposable
Tilt Angle Adjustment	Manual with optional in-cab controls
<b>Debris Hopper</b>	
Volumetric Capacity	8.4 cubic yards (6.4 cu. meters)
Useable Capacity	7.0 cubic yards (5.4 cu. meters)
Dump Angle	53 degrees
Floor Angle	3 degrees
Lifting	Twin hydraulic cylinders
Hopper Dump Door	Open/close/lock hydraulically
Inspection Doors	1 on each side of hopper
Screens	Sawtooth Drop Down Design
<b>Hydraulic System</b>	
Type	Dual output 2 section
Pump Capacity	6.5 gpm @1800RPM (24.6L / min.) per section for 13.0gpm total
Drive	Direct gear
Maximum Pressure	2500psi (173 bar)
Reservoir	25 gallons (94 liters)
Filter	10 micron, spin on
Protection	Pressure relief valve
Controls	Electro-hydraulic
<b>Auxiliary Hydraulic System</b>	
Type	Gear type, driven by electric motor
Function	Raise/lower hopper, open/close hopper door, raise/lower brooms and pickup head
NOTE: Specifications are subject to change without notice	

**Affiliates**



Schwarze Industries, Inc.  
1055 Jordan Road  
Huntsville, AL 35811  
Central phone: 256-851-1200

